


STI MANUFACTURING, INC.

STYLE 4R


SHEATH TYPE RTD WITH ARMOR AND FLEXIBLE INSULATED LEAD WIRE FOR MAXIMUM OPERATING TEMPERATURE OF 1200 DEG. F. 22 ga. LEAD WIRE STANDARD, OTHER GAUGES AVAILABLE.

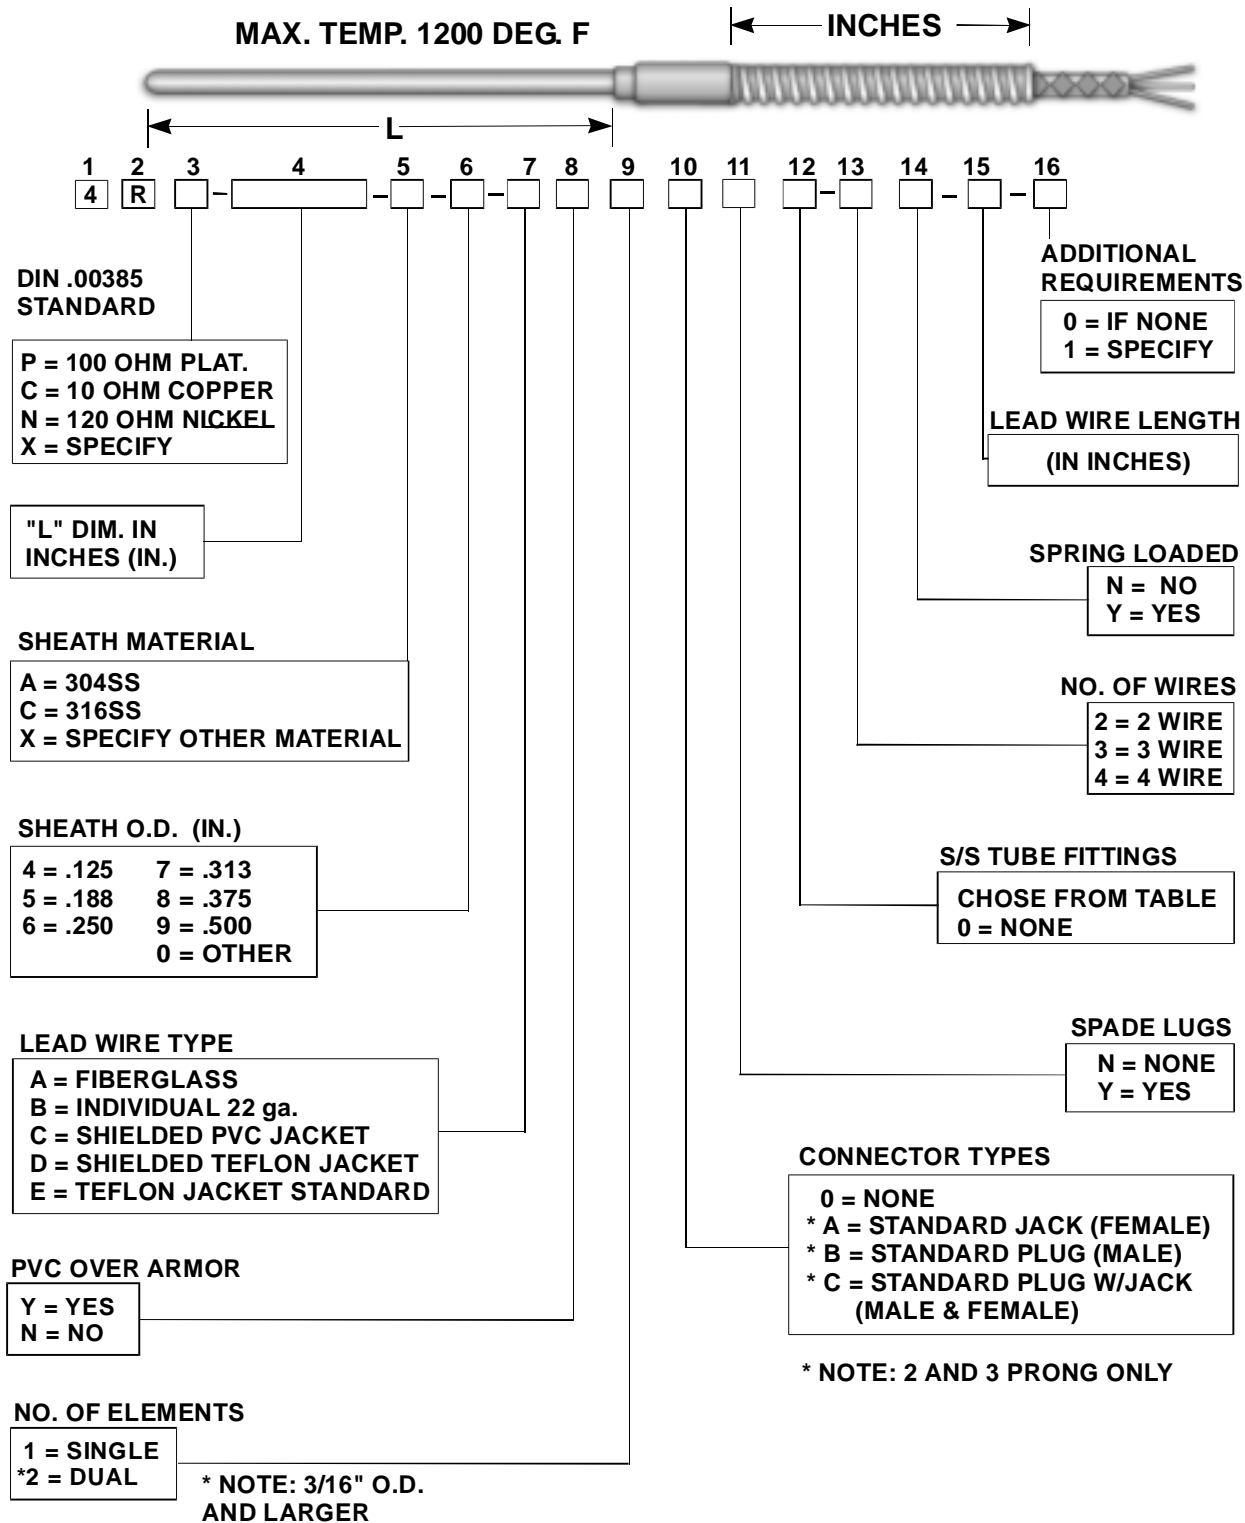


STI MANUFACTURING, INC.

STYLE 4R OPTIONS


QUICK DISCONNECT
CONNECTORS

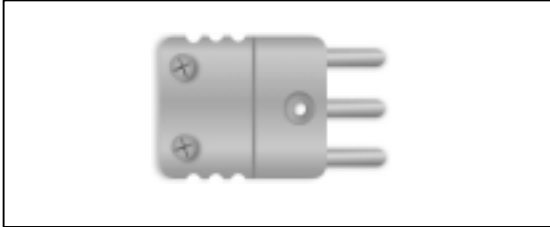

SPRING LOADING




WELD PADS

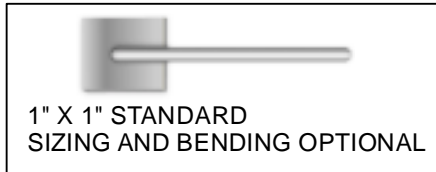

CORD GRIPS



TUBE TO PIPE FITTINGS
STAINLESS STEEL STANDARD
OTHER MATERIALS AVAILABLE

	RTD O.D. X NPT	
		1/8"
	3/16"	1/4" = 3
	1/4"	1/4" = 4
	1/4"	1/2" = 6
	3/8"	1/2" = 7
	1/2"	1/2" = 8