


STI MANUFACTURING, INC.

STYLE 2B_{FIXED}

SHEATH TYPE THERMOCOUPLE WITH SS HEX NIPPLE FIXED DIRECT TO SHEATH WITH FLEXIBLE INSULATED LEAD WIRE, 20 ga. STANDARD, OTHER GAUGES AVAILABLE.

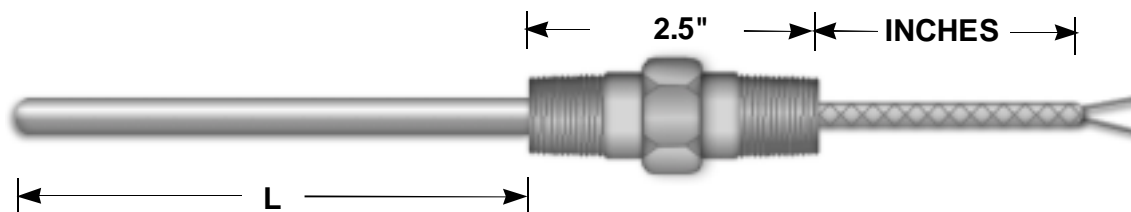


1	2	3	4	5	6	7	8	9	10	11	12	13	14
2	B	F											
CALIBRATION													
E J K T													
"L" DIM. IN INCHES (IN.)													
SHEATH MATERIAL													
A = 304SS C = 316SS B = INC. 600 D = 310SS X = SPECIFY OTHER MATERIAL													
SHEATH O.D. (IN.)													
1 = .020 6 = .250 2 = .040 7 = .313 3 = .062 8 = .375 4 = .125 9 = .500 5 = .188 0 = OTHER													
316SS HEX NIPPLES													
4 = 1/2 X 1/2" NPT 8 = 1/2 X 3/4" NPT 10 = 1/2 X 1" NPT X = 1/2 X 1/2" NPT OIL SEAL OTHERS AVAILABLE													
										ADDITIONAL REQUIREMENTS			
										0 = IF NONE 1 = SPECIFY			
										NO. OF ELEMENTS			
										1 = SINGLE 2 = DUAL 3 = TRIPLEX			
										LEAD WIRE TYPE			
										1 = FIBERGLASS 2 = PVC 3 = TEFLON 4 = KAPTON 5 = F/G W/ SS OVERBRAID X = DRAIN WIRE			
										LEAD WIRE LENGTH			
										(IN INCHES)			
										JUNCTIONS			
										GROUNDED UNGROUNDED G U EXPOSED E			
										SPADE LUGS			
										N = NONE Y = YES			

STI MANUFACTURING, INC.


STYLE 2BF OPTIONS

REDUCED TIPS

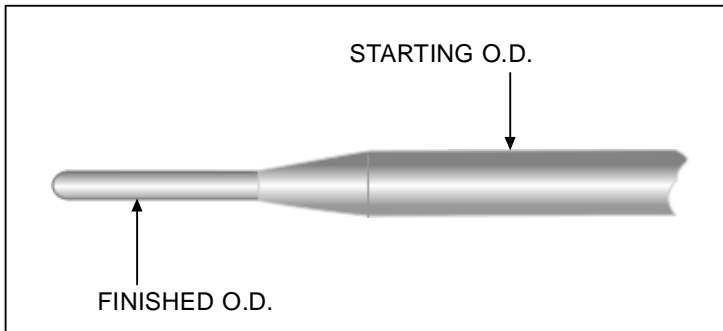

STANDARD HEX NIPPLE

1/2" NPT 316SS



OTHER MATERIALS
AND SIZES AVAILABLE