


STI MANUFACTURING, INC.

STYLE 2R


SHEATH TYPE RTD WITH FLEXIBLE INSULATED LEAD WIRE FOR MAXIMUM OPERATING TEMPERATURE OF 1200 DEG. F. 22 ga. LEAD WIRE STANDARD, OTHER GAUGES AVAILABLE.

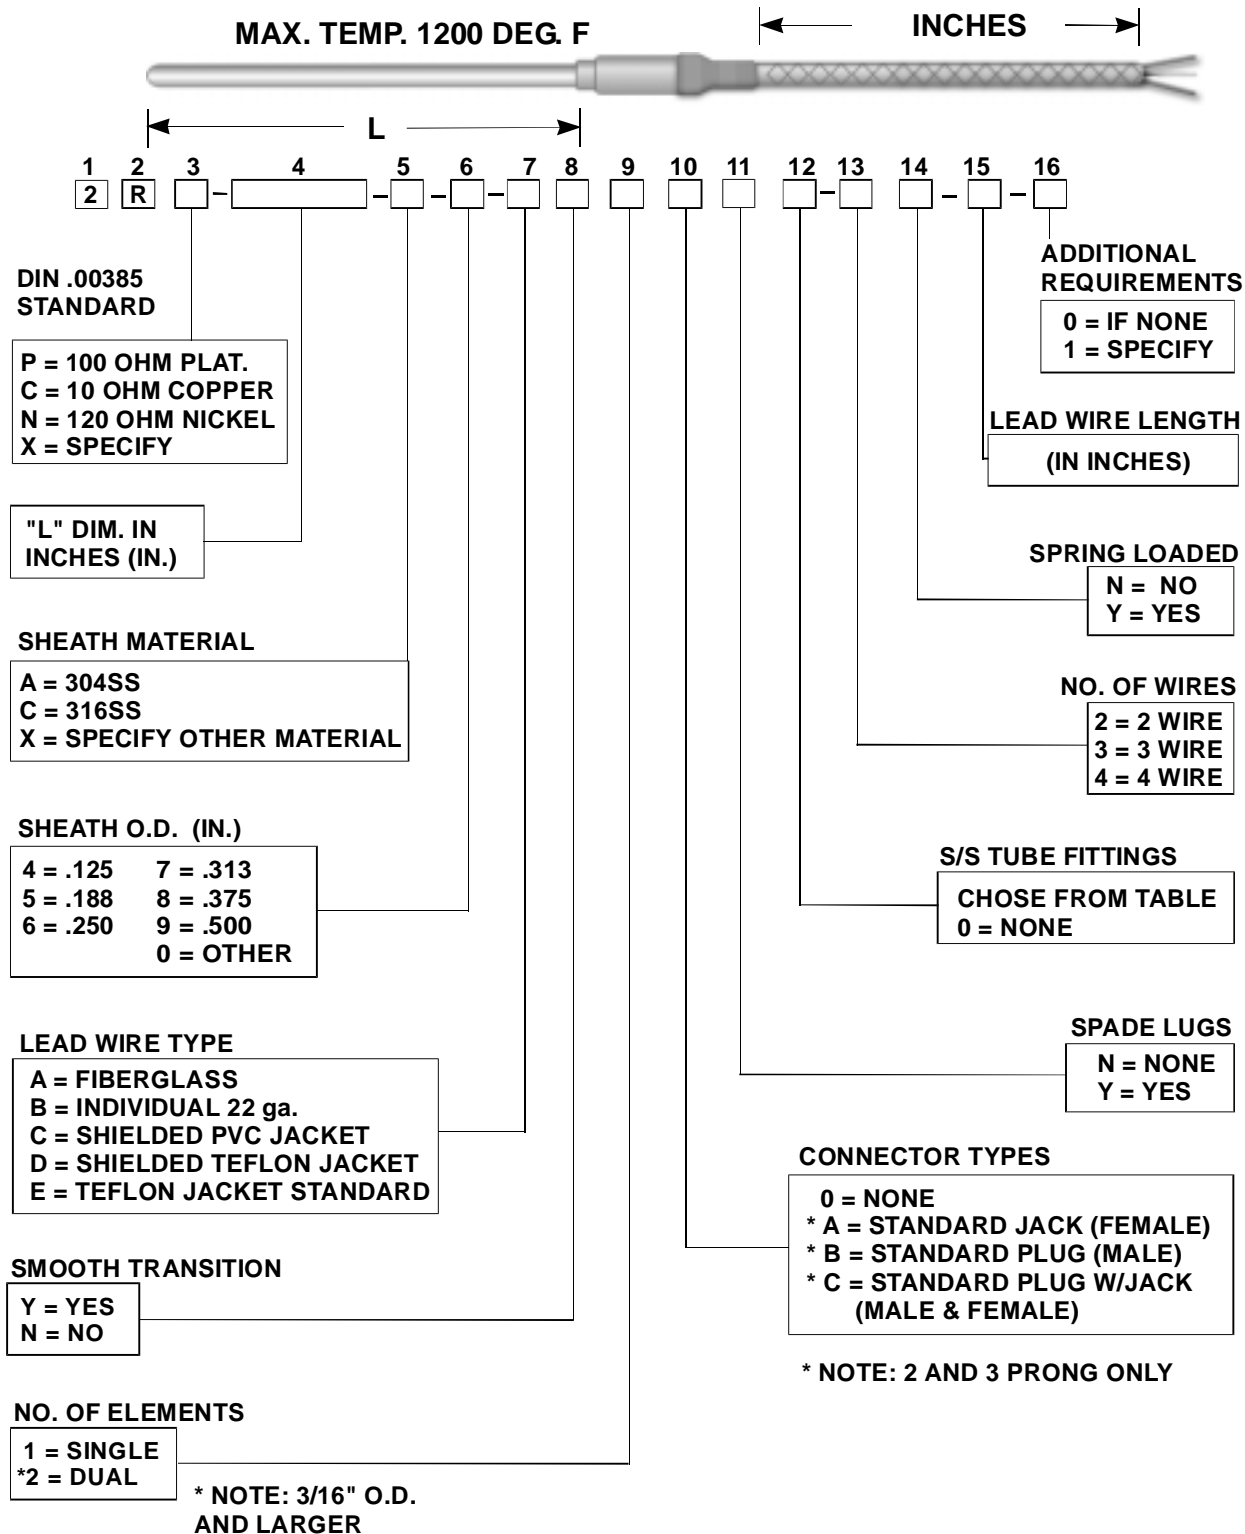


STI MANUFACTURING, INC.

STYLE 2R OPTIONS


QUICK DISCONNECT CONNECTORS

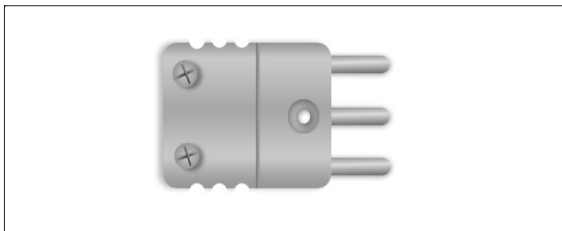


SPRING LOADING



WELD PADS

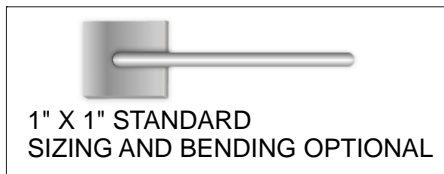

SMOOTH TRANSITIONS

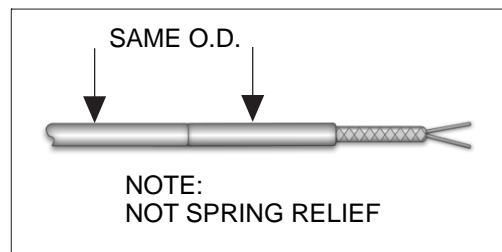

TUBE TO PIPE FITTINGS
STAINLESS STEEL STANDARD
OTHER MATERIALS AVAILABLE

RTD O.D. X NPT	RTD O.D. X NPT	
	1/8"	1/8"
3/16"	1/4"	= 3
1/4"	1/4"	= 4
1/4"	1/2"	= 6
3/8"	1/2"	= 7
1/2"	1/2"	= 8
IF VENTED = X		